

S.10

Compact, Two-way Passive System



S•SERIES

Features

- Full-range, passive two-way system
- KTV specific voicing
- Enhanced bass response from rear port
- LF driver with demodulating ring for distortion-free vocals
- User-rotatable horn
- Vertical and horizontal mounting option
- Cloth-backed perforated steel grille
- Trapezoid enclosure with textured finish
- 8Ω nominal impedance
- Internal crossover network with LF and HF driver protection
- Twin NL4 connectors
- Multiple M8 rigging inserts

Applications

- Family KTV, BOX KTV and KTV lounges
- Music bars



The S.10 is very compact, two-way passive loudspeaker designed for family KTV, BOX KTV and music bars rooms which call for enjoyable sound over short throw distances. It utilises a 10" (250mm)/2.5" (63mm) voice coil LF driver and a 1" (25mm) exit HF compression driver with a 1.4" (35mm) polyimide diaphragm.

It is capable of high output levels for its small size and its rotatable 90° x 50° HF horn provides extremely smooth coverage. Equal horizontal and vertical horn mouth dimensions ensure its excellent directivity control is maintained in both planes. The S.10's trapezoid enclosure is constructed from 15mm engineered wood fibre and finished in a textured black paint. It is fitted with a cloth-backed protective steel grille and M8 inserts are provided for eyebolt suspension and installation.

S.10

Compact, Two-way Passive System






S•SERIES

Technical Specifications

TYPE	Compact, passive two-way system
FREQUENCY RESPONSE (1)	65Hz-20kHz \pm 3dB -10dB @ 49Hz
DRIVERS	LF: 10" (250mm)/2.5" (63.5mm) voice coil, ferrite motor system HF: 1" (25mm) exit/1.4" (35mm) voice coil, polyimide dome compression driver
RATED POWER (2)	500W program, 1000W peak
RECOMMENDED AMP	VIA2502
SENSITIVITY (8)	98dB
MAXIMUM SPL (9)	124dB program, 127dB peak
NOMINAL IMPEDANCE	8 ohms
DISPERSION (-6dB)	90° H x 50° V (user-rotatable)
CROSSOVER	2.8kHz passive
ENCLOSURE	Trapezoid
FINISH	Black textured paint
PROTECTIVE GRILLE	Black perforated steel with scrim cloth backing
CONNECTORS	2 x NL4 type
PIN CONNECTIONS (INPUT)	1+/-
PIN CONNECTIONS (LINK)	1+/- to 1+/-
FITTINGS	14 x M8 inserts
DIMENSIONS	(W) 300mm x (H) 530 x (D) 345mm (W) 11.8ins x (H) 20.9ins x (D) 13.6ins
WEIGHT	16kg (35.3lbs)

Notes

- (1) Measured on-axis in half (2pi) space at 2 metres, then referred to 1 metre.
- (2) AES Standard ANSI S4.26-1984.
- (3) Measured in half (2pi) space at 2 metres with 1 watt input, using band limited pink noise, then referred to 1 metre.
- (4) Measured in half (2pi) space at 2 metres using band limited pink noise, then referred to 1 metre.
- (5) Measured on-axis in open (4pi) space at 2 metres, then referred to 1 metre.
- (6) Measured in open (4pi) space at 2 metres with 1 watt input, using band limited pink noise, then referred to 1 metre.
- (7) Measured in open (4pi) space at 2 metres using band limited pink noise, then referred to 1 metre.
- (8) Measured in open (4pi) space at 2 metres with 2.83v input, using band limited pink noise, then referred to 1 metre.
- (9) Calculated at 1 metre.
- (10) Measured in half (2pi) space at 2 metres with 2.83V input, using band limited pink noise, then referred to 1 metre.

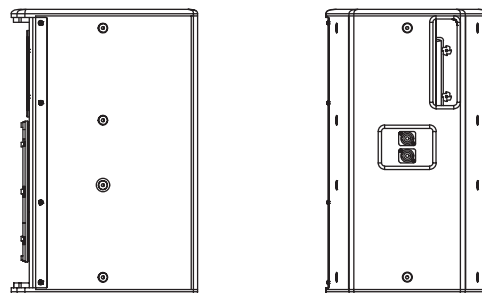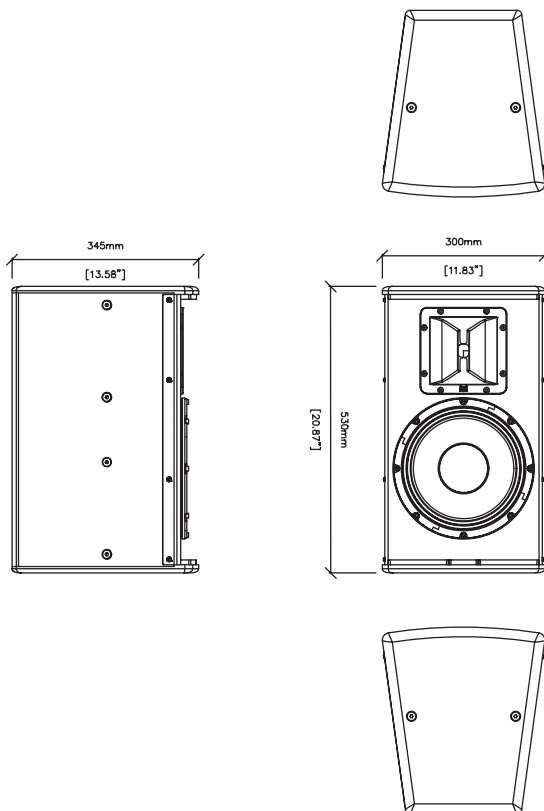

S.10

Martin Audio Ltd
Century Point, Halifax Road, High Wycombe
Buckinghamshire HP12 3SL, England

Telephone: +44 (0) 1494 535 312
Facsimile: +44 (0) 1494 438 669
Email: info@martin-audio.com

