







Instruction Manual

Product Model:X6max

1: Product features


- Ci custom installation;

2: Standard Accessories


Steel mesh(1PC) (A)	Positioning paper card(1PC) (B)	Long Screws(2PCS) (C)	Suspension bracket(1PC) (E)	Short Screws(2PCS) (F)
	 1: Place the installation board in the area where the speaker needs to be installed; 2: Use the pen to draw a line on the outer edge of the installation board; 3: Cut the installation area along the pencil line with a hand saw; (Ensure that the mounting hole size is not larger than the drawing line size) ⚠ Check the wall for obstacles before cutting!	 Expansion anchor bolt sleeve(2PCS) (D) 		

3: Installation Instructions

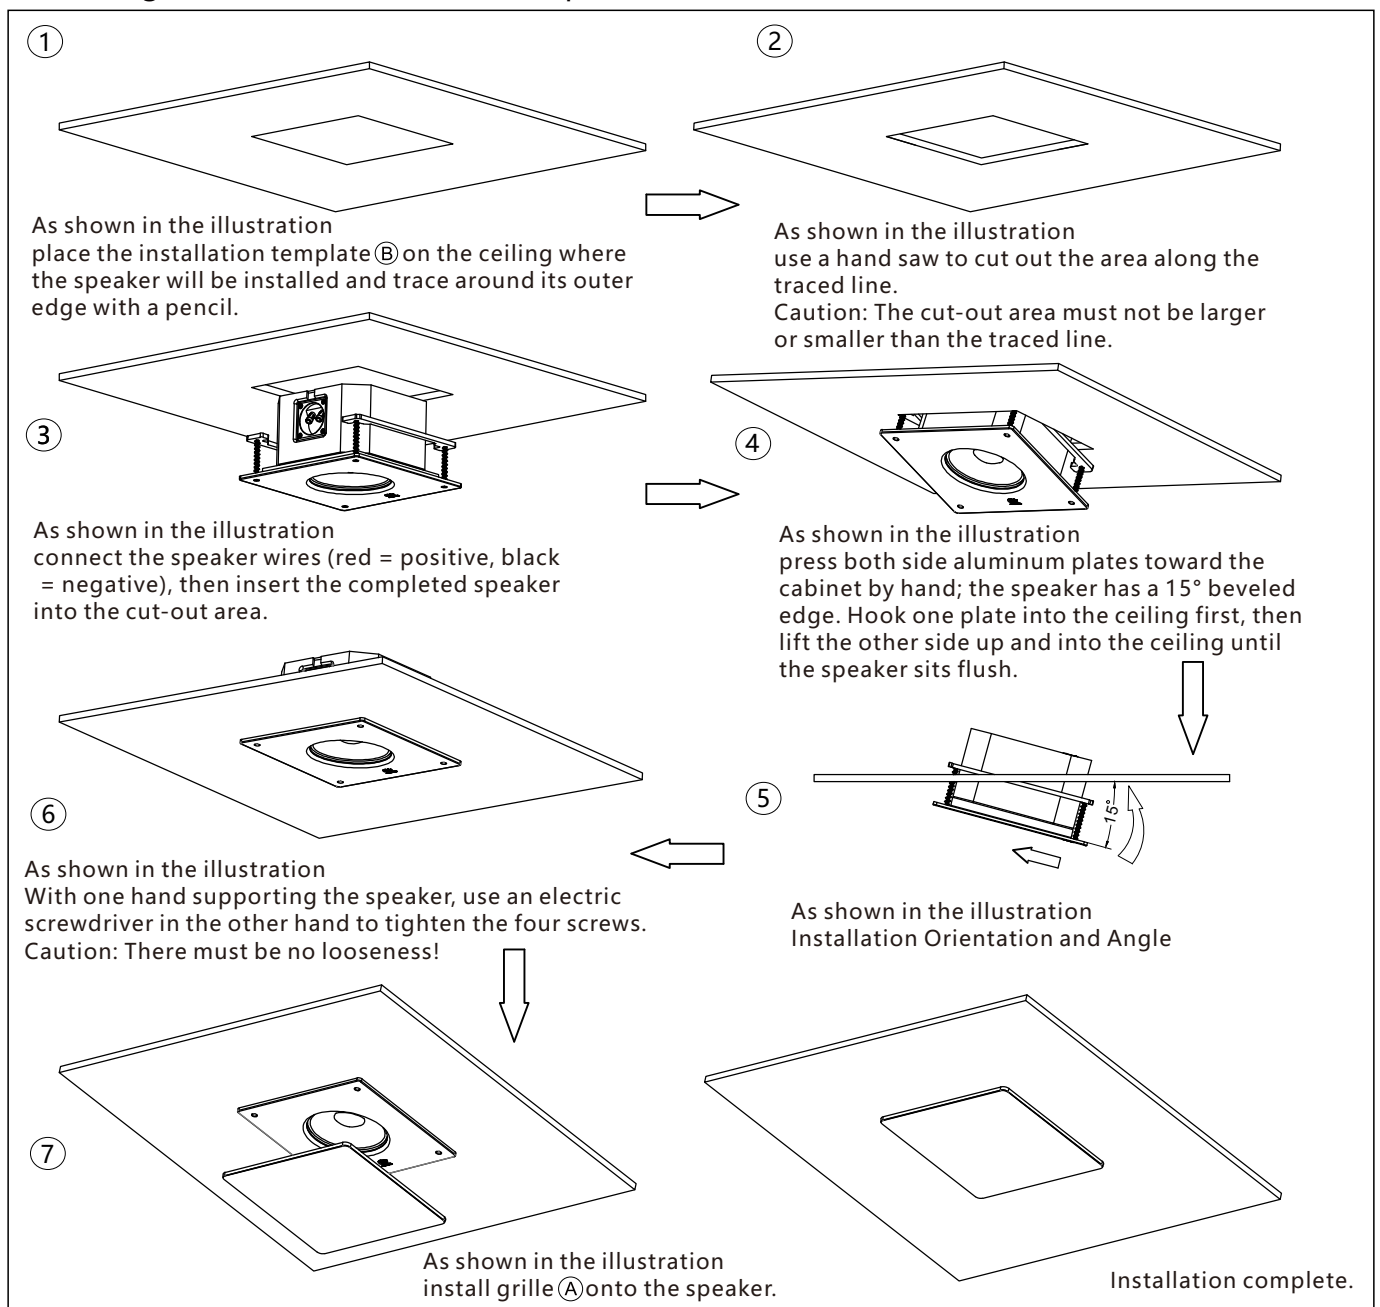
A: Ceiling Flush-Mount Installation Steps



B: Wall Flush-Mount Installation Steps

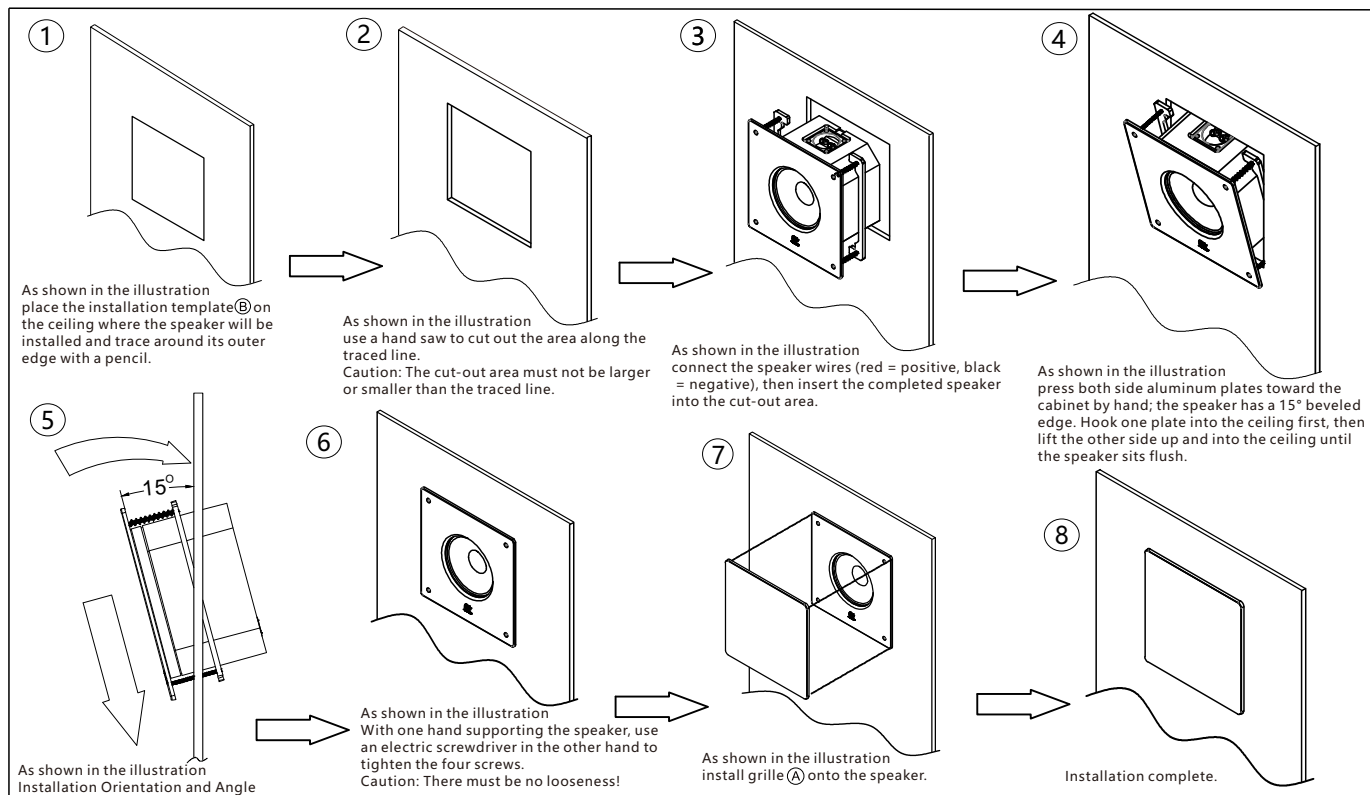

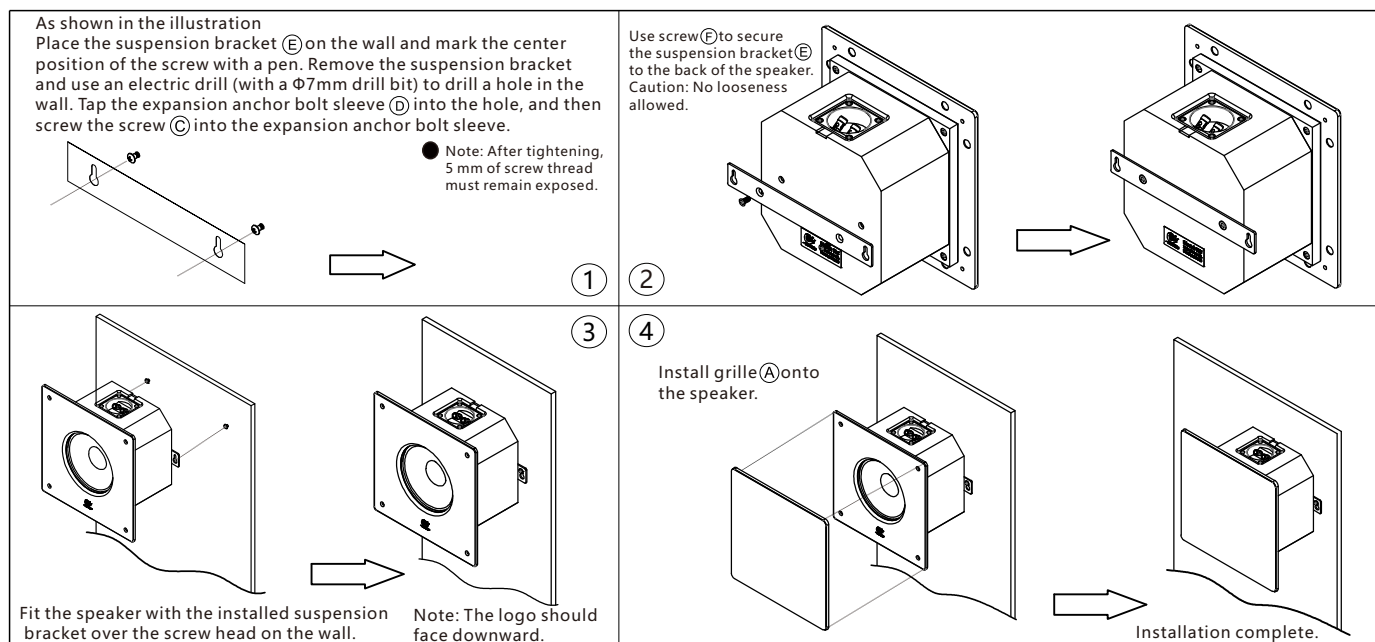C: Ceiling Suspension Installation Steps



4: Technical Parameters

Drive Unit: 1x6"LF Driver, 1x1"HF compression driver
 Frequency Response Range: 70Hz-22KHz(± 3 dB);
 Power Max: 400W;
 Sensitivity: 91dB/W/m;
 Avg. Max Output: 115dB;
 Input Impedance: 8 Ω ;
 Net Weight: 4KG(single)
 Product dimensions: 233*233*115mm
 Hole dimensions: 208*208mm, Depth > 110mm

5: Finished product size drawing

